
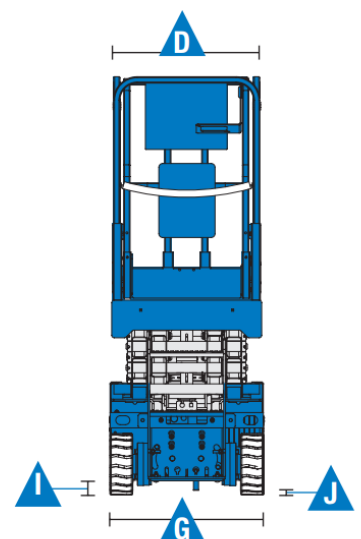
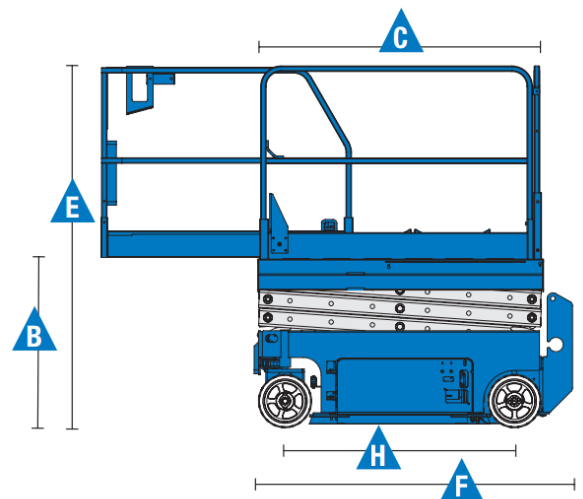


OPERATING DIMENSIONS	
Maximum Working Height	7.60 m
(A) Platform Height Maximum	5.60 m
(B) Platform Height Stowed	1.00 m
(C) Platform Length – Outside / Extended	1.63 m, 2.54 m
Slide-out platform extension deck	0.91 m
(D) Platform Width – Outside	0.74 m
Guardrail Height	1.10 m
Toeboard Height	0.15 m
(E) Height – stowed: folding guardrails rails folded	2.11 m 1.75 m
(F) Length – stowed	1.83 m
Length – stowed, extended	2.74 m
(G) Width	0.813 m
(H) Wheelbase	1.32 m
(I) Ground clearance – centre	6 cm
(J) with pothole guards deployed	2 cm
PRODUCTIVITY	
Max Platform Occupancy (in/out)	2/1
Lift capacity	227 kg
Drive speed – stowed	2.5 mph
Drive speed - raised	0.5 mph
Gradeability – stowed**	25%
Turning Radius – inside	Zero
Turning Radius – outside	1.55 m
Raise / lower speed	16 / 29 sec
Controls	proportional
Drive	Dual front wheel
Multiple disc brakes	Dual rear wheel
Tyres – solid non-marking	30 x 11 x 20 cm
POWER, SOUND AND WEIGHT	
Power Source	24 V (four 6 V 225 Ah Batteries)
Hydraulic System Capacity	14.2 L
Sound Pressure Level (ground workstation)	70 dB(A)
Sound Pressure Level (platform workstation)	70 dB(A)
Vibration	2.5 m/s ²
Weight	1503 kg

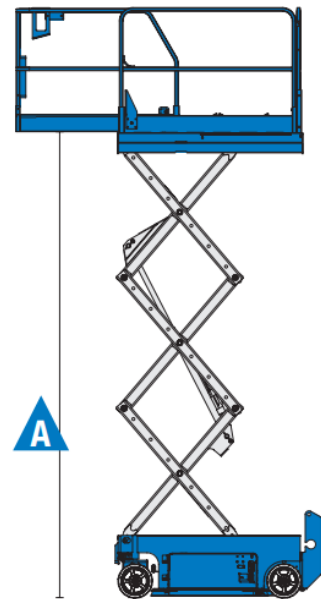

Standard Features

Measurements

- 7.60 m working height
- Up to 227 kg lift capacity

Productivity

- Folding rails with half-height swing gate
- Smart link™ control system (joystick, 2 lift speeds & 2 selectable proportional drive speeds, user friendly diagnostics)
- Recessed charger receptacle
- Platform control with battery charge indicator
- On-board diagnostics system
- AC power to platform
- Lanyard attachment points
- Manual platform lowering valve
- Emergency stop at both platform and ground controls
- Rear wheel multiple disc brakes
- Front wheel hydraulic dynamic braking
- Manual brake release
- Swing-out component trays
- Pothole guards
- Tilt level sensor with audible alarm
- Descent alarm
- Flashing beacons
- Electronic horn
- Hour meter
- Certified load sensor
- Telematics-ready connector

Power

- 24 V DC battery pack
- Universal 20amp smart charger

Easily Configured To Meet Your Needs

Platform

- 1.63 x 0.74 m steel platform
- 0.91 m slide-out extension deck

Power

- 24 V DC battery pack (four 6 V 225 Ah batteries)

Drive

- Dual front wheel drive

Tyres

- Solid non-marking

Options & Accessories

Productivity options

- Air line to platform
- Power to platform (incl. plug, socket and ground fault interrupt leakage on request)
- Biodegradable hydraulic oil
- Track & Trace (GPS unit providing machine location & operating information)
- Motion alarm package
- Automotive horn

Power Options

- Maintenance-free batteries
- Low-temperature cut-out module

