


## Features



## Carrier Weight Classes

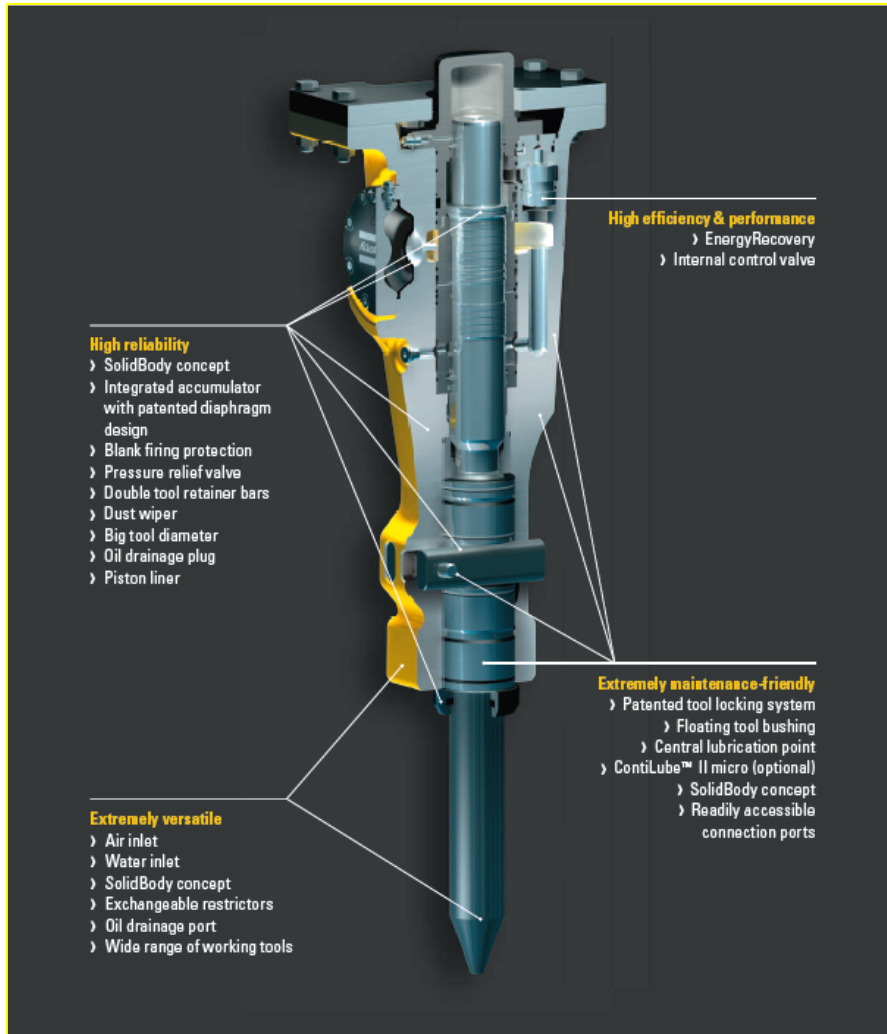

### Everything you want from a hydraulic breaker

SB hydraulic breakers are slim, compact and simple to handle, making them extremely versatile. Combining superior efficiency and performance with high reliability and serviceability.

### Whatever your industry

Choose an SB hydraulic breaker as your partner for a huge range of tasks. Suitable for most carriers like micro and mini excavators, backhoe and skid steer loaders as well as demolition robots, it will get the job done – quickly and economically!

		SB52	SB102	SB152	SB202	SB302	SB302 Scaler	SB452	
Technical data	Carrier weight class	t	0.7-1.1	1.1-3.0	1.9-4.5	2.5-6.0	4.5-9.0	4.5-9.0	6.5-13
	Service weight	kg	55	90	140	200	300	300	440
	Oil flow rate	l/min	12-27	16-35	25-45	35-65	50-80	50-80	55-100
	Operating pressure	bar	100-150	100-150	100-150	100-150	100-150	100-110	100-150
	Max. hydraulic input power	kW	7	9	11	17	20	15	25
	Impact rate	bpm	750-1.700	750-2.300	850-1.900	850-1.800	600-1.400	950-1.250	550-1.250
	Working tool diameter	mm	40	45	50	65	80	80	95
	Sound power level guaranteed	dB(A)	117	115	114	118	119	118	122
	Sound pressure level (r=10m)	dB(A)	89	87	85	90	91	89	94
Feature Overview	EnergyRecovery	●	●	●	●	●	●		
	ContiLube™ II Micro/ContiLube™ II	○	○	○	○	○	○		
	AutoStart	●	●	●	●	●	●		
	Water inlet (for dust suppression)	—	—	●	●	●	●	●	
	Water nozzles	—	—	○	○	○	●	○	
	Air inlet (for underwater/tunnelling work)	●	●	●	●	●	●	●	
	Oil drainage plug	—	—	●	●	●	●	●	
	Pressure relief valve	●	●	●	●	●	●	●	
	Dust wiper	●	●	●	●	●	●	●	
	Replaceable wear protection plate	—	—	—	—	—	—	—	

● = standard    ○ = optional

Tool Type	Model	Tool width	Working length	Total length
		mm	mm	mm
Moil point (conical)	SB52	—	255	420
	SB102	—	250	450
	SB152	—	250	510
	SB202	—	300	600
	SB302	—	440	800
	SB452	—	470	840