

Standard Equipment

- ✓ Single-phase 230V/50Hz electric motor
- ✓ IP67 plug
- ✓ Frame with 4 aluminium wheels
- ✓ Upper limit safety device
- ✓ Direct controls with 3-pushbutton 1.5-m pendant control
- ✓ Positioning brake
- ✓ Self-braking motor with magnetic device


Optional Accessories

- ✓ 300 kg gantry

Applications

It ensures maximum reliability and durability.

The gearmotor is built with helical-toothed steel gears in oil bath.

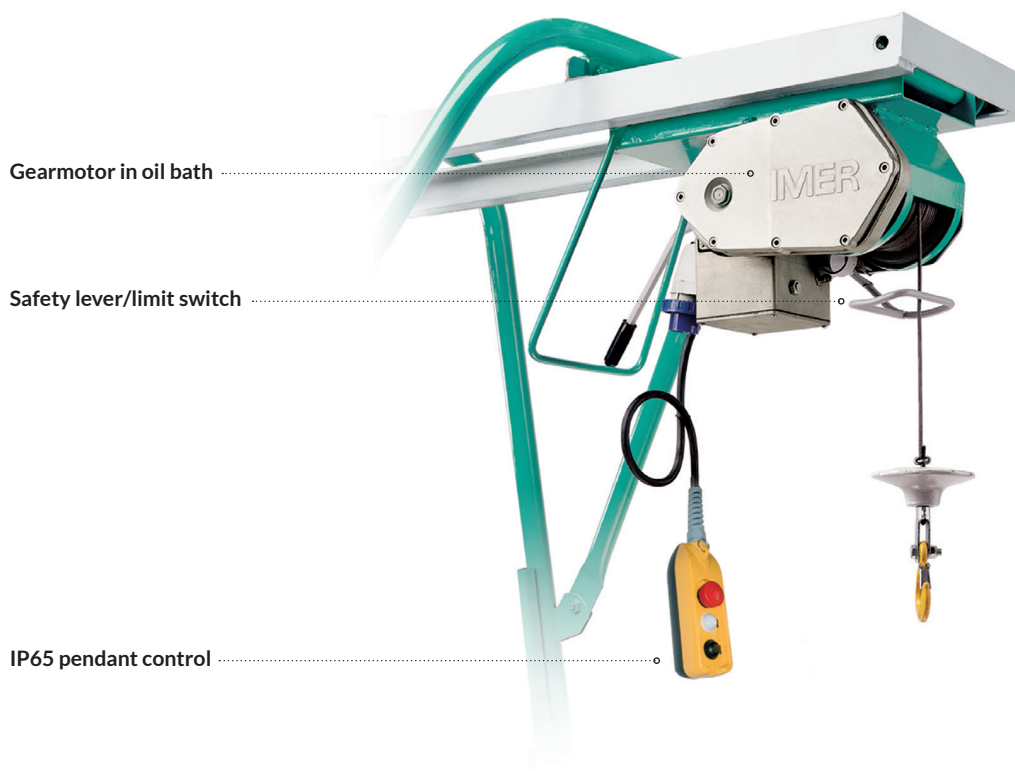

Gearmotor in oil bath

Safety lever/limit switch

IP65 pendant control

300 kg 

19 m/min 

30 m 

ET 300 N

| | | |
|-------------------------------|--------|------------------------------|
| Maximum capacity | kg | 300 |
| Av. full load lifting speed | m/min | 19 |
| Max. working height | m | 30 |
| Ø steel rope | mm | 5 |
| Rope length | m | 31 |
| Electric power supply | V / Hz | 230 / 50 Sph 110 / 50 Sph |
| Motor power rate | kW | 1.1 |
| Motor speed | rpm | 1320 |
| Running current 230 V (110 V) | A | 12 (18) |
| Machine weight | kg | 50 |
| SPL in operator's position | dB(A) | <75 |
| Dimensions w/l/h | mm | 330/780/380 |
| Packing dimensions w/l/h | mm | 350/820/440 |