



**OPERATING DIMENSIONS**

Maximum Working Height	5.9 m
(A) Platform Height Maximum	3.9 m
(B) Platform Height Stowed	0.90 m
(C) Platform Length - Outside	1.26 m
Extended	1.72 m
Slide-out Platform Extension Deck	0.46 m
(D) Platform Width - Outside	0.67 m
Guardrail Height	1.10 m
Toeboard Height	0.15 m
(E) Height - stowed: fixed rails	2.02 m
folding rails	2.02 m
rails lowered	1.68 m
(F) Length - stowed	1.41 m
- stowed extended	1.87 m
(G) Width	0.78 m
(H) Wheelbase	0.98 m
(I) Ground Clearance - centre	6 cm
with pothole guards deployed	2 cm

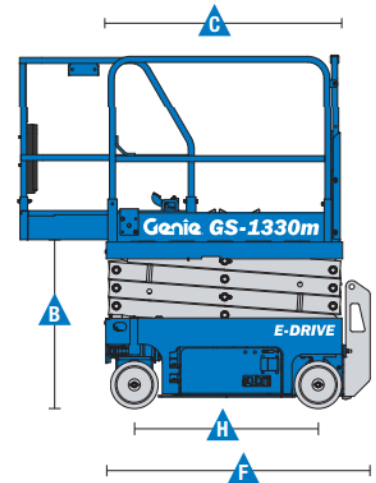


**PRODUCTIVITY**

Max platform occupancy (indoor/outdoor)	2/-
Lift Capacity	227 kg
Lift Capacity - extension deck	91 kg
Drive height	Full Height
Drive speed - stowed	2.5 mph
Drive speed - raised	0.5 mph
Gradeability - stowed***	25%/14°
Turning radius - inside	40 cm
Turning radius - outside	1.55 m
Raise/lower speed	20 / 24 sec
Controls	Proportional
Drive	Dual rear wheel, electric
Brakes	Dual rear wheel, electric
Tyres solid non-marking	25.4 x 7.62 cm

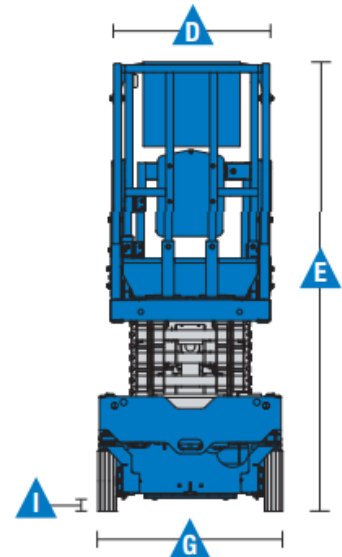

**POWER & WEIGHT**

Power Source	24 V DC (two 12 V 85 Ah batteries)
Hydraulic System Capacity	5.6 L
Weight****	885 kg

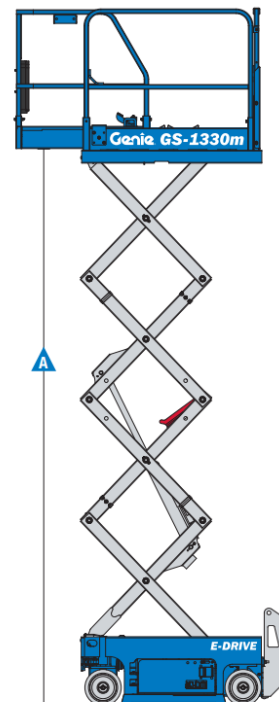

\* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

\*\* Indoor use only for the GS-1330m

\*\*\* Gradeability applies to driving on slopes, see Operator's Manual for details regarding slope ratings.

\*\*\*\* Weight will vary depending on options and/or country standards.

## FEATURES

### Measurements

- Max. working height of 5.9 m
- Up to 227 kg lifting capacity
- 1.26 m x 0.67 m steel platform
- 0.46 m extension deck

### Productivity

- Folding rails with half height swing gate
- Dual rear wheel DC electric drive
- Smart Link™ control system - joystick, 2 lift speeds & 2 selectable proportional drive speeds, user-friendly diagnostics
- Rear recessed charger receptacle
- Platform control with battery charge indicator
- On-board diagnostic system
- AC power to platform
- Lanyard attachment points
- Manual platform lowering valve
- Emergency stop at both platform & ground controls
- Dual rear wheel electric brakes
- Electric brake release
- Swing-out component trays
- Pothole guards
- Tilt level sensor with audible alarm
- Descent and motion alarms
- Dual flashing LED beacons
- Electronic horn
- Hour meter

### Power & Tyres

- 24 V DC battery pack
- 24 V DC (two 12V 85 Ah batteries)
- Universal 20 amp smart charger
- Solid non-marking tyres

